
## DOCK SEAL/SHELTER - D-150/650-15

APPROX WEIGHT: 164.33 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!

\*\*\*ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE\*\*\*

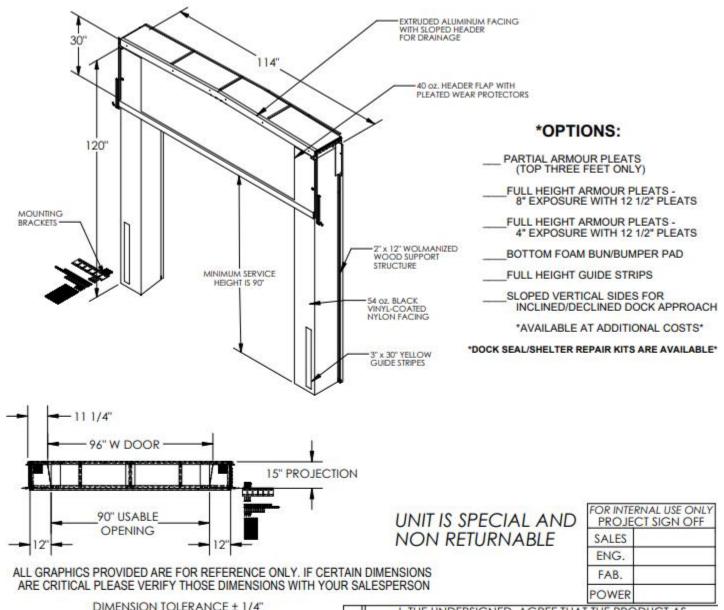

P

P

R

0

DIMENSION TOLERANCE ± 1/4"

## STANDARD FEATURES

MODEL NUMBER IS D-150/650-15 DOCK SEAL/SHELTER PROJECTION IS 15" DOOR OPENING IS 8 FEET WIDE x 10 FEET HIGH DOCK HEIGHT IS 48 INCHES COVERING CONSTRUCTED OF SLOPED

WOLMANIZED WOOD WITH ALUMINUM TRIM 30" HIGH FLAP CONSTRUCTED OF 40 OZ BLACK

VINYL-COATED NYLON

SEAL SIDES ARE FILLED WITH HIGH DENSITY POLYURATHANE FOAM

2" x 12" WOLMANIZED LUMBER SUPPORTING STRUCTURE

## SPECIAL FEATURES

NONE

\*\*ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING, AS THIS WILL BE CONSIDERED ALL INCLUSIVE, \*\*

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS
REPRESENTED SATISFIES DESIGN AND DIMENSION
REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO
CONFIRM PRODUCT AND INSTALLATION
COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
AND LOCAL REGULATIONS AND STANDARDS.

## ANY MODIFIED UNITS ARE NON-RETURNABLE

[ ] As marked

V	[ ] As diawii	[ ] As marked	
V A L	Signed:	Date:	
니	Printed Name:		

I 1 Ac drawn

DISTRIBUTOR'S NAME:		P.O.# X	
		W.O.# X	
DRAWN BY: BCN	DATE: 5/5/2016	SALES: X	
REFERENCE: V	SCALE: 1:	35 FILE NAME:	

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

QUOTED LEAD TIME: X 35-007-043