
## MECHANICAL EDGE-O-DOCKLEVELER - FM-2066

APPROX WEIGHT: 483.06 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON.

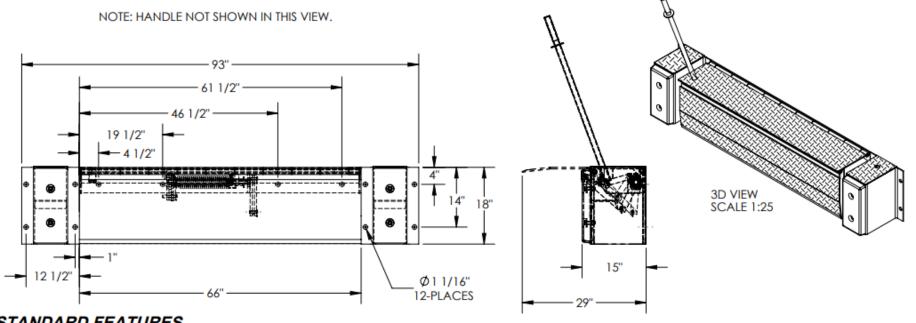

## STANDARD FEATURES

MODEL NUMBER IS FM-2066 **DECK WIDTH IS 66" OVERALL WIDTH IS 93"** MAX CAPACITY IS 20,000 LBS STANDARD TOE GUARDS **GREASE ZERK FITTINGS** 18" HIGH BUMPERS (TO SERVE LOW TRUCKS) ADJUSTABLE TORSION SPRING COUNTERBALANCE MECHANISM SERVICE RANGE OF 5" ABOVE AND BELOW DOCK UNIT COMES COMPLETE WITH BUMPERS AND HANDLE TREADPLATE RAMP & DECK CONSTRUCTION

EDGE-O-DOCKS & DOCK SEALS OR SHELTERS CAN BE USED TOGETHER. DOCK SEALS OR SHELTERS REQUIRE A 20" MINIMUM PROJECTION

## SPECIAL FEATURES

NONE

APPROVA	REPRESENTED SATISF REQUIREMENTS. I ALSO CONFIRM PROD COMPLIANCE WITH AL AND LOCAL REGU ANY MODIFIED UNIT	AGREE THAT THE PRODUCT AS IES DESIGN AND DIMENSION D ACKNOWLEDGE MY DUTY TO DUCT AND INSTALLATION LL APPLICABLE FEDERAL, STATE LATIONS AND STANDARDS.  [S ARE NON-RETURNABLE In [] As marked				
	Signed:	Date:				
-	Printed Name:					
	LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING					
	DISTRIBUTORIS NAME:					

		TELLIE THE THE THE STATE OF ST			
FOR INTERNAL USE ONLY PROJECT SIGN OFF		DISTRIBUTOR'S NAME:		P.O.# X	
SALES				W.O.# X	
ENG.		DRAWN BY: MW	DATE: 01/02/2013	SALES: X	
FAB.		REFERENCE: X	SCALE: 1:20	FILE NAME:	
POWER		QUOTED LEAD TIME: X	QUOTE #	07-007-003	
		reference: X	01/02/2013 SCALE: 1:20	FILE NAME:	