
MECHANICAL DOCKLEVELER - RR-68-20

APPROX WEIGHT: 2141 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

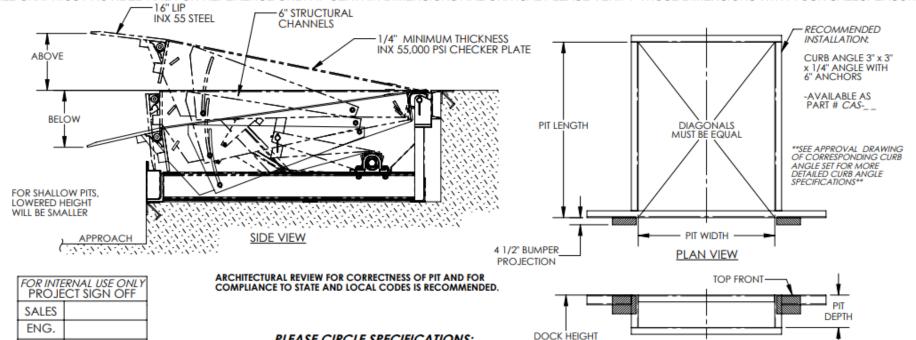

PLEASE CIRCLE SPECIFICATIONS:

(PIT) CONSTRUCTION

(PIT) CONSTRUCTION

STANDARD FEATURES

FAB.

POWER

DOCKEVELER MODEL NUMBER: RR-68-20 PIT WIDTH IS: 74 INCHES PIT LENGTH IS: 86 INCHES PIT DEPTH IS 24 INCHES AT FRONT, 23 3/4 INCHES AT BACK DOCK HEIGHT IS 48 INCHES (48 INCHES STANDARD) DOCKLEVELER CAPACITY (GROSS ROLLING LOAD) IS 20,000 LBS. VERTICAL SERVICE RANGE IS 12 INCHES ABOVE AND 12 INCHES BELOW DOCK INCLUDES (2) 1014-4.5 LAMINATED DOCK BUMPERS DURABLE LÍQUID PAINT BROWN FINISH WITH YELLOW DECK SIDES & TOE GUARDS ***SINGLE AXLE CAPACITY NOT TO EXCEED 70% OF LOAD***

NEW

EXISTING

ALL STRUCTURAL STEEL CONSTRUCTION WELDING MEETS AWS DESIGN, ENGINEERING, AND FABRICATION COMPLIES WITH OSHA & ANSI MH30.1 -INSTALL TO MEET ALL APPLICABLE STATE & LOCAL CODES FOR YOUR AREA!

SPECIAL FEATURES

NONE

SEE DRAWING NUMBERS RR-1 THRU RR-4 FOR MORE INSTALLATION INFO

FRONT VIEW

	APPROVAL	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS. ANY MODIFIED UNITS ARE NON-RETURNABLE [] As drawn [] As marked Signed:Date:				
			IED APPROVAL DRAWII	NG		
	ISTRI	BUTOR'S NAME:		02	P.O.# X	
			W.O.# X			
DRAWN BY: TJM			DATE:	02/27/12	SALES: X	
REFERENCE: X SCALE: NTS					TS FILE NAME:	
OUOTED LEAD TIME:					07-007-012	