
MEDIUM DUTY NARROW MAST STACKER - SNM15-62-FF-27

ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

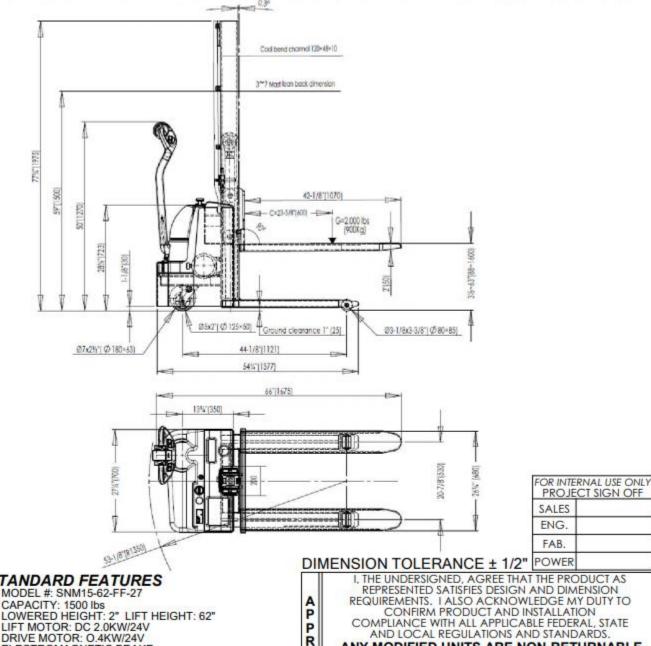

0

A

Printed Name:

STANDARD FEATURES

CAPACITY: 1500 lbs LOWERED HEIGHT: 2" LIFT HEIGHT: 62" LIFT MOTOR: DC 2.0KW/24V DRIVE MOTOR: 0.4KW/24V ELECTROMAGNETIC BRAKE BATTERY: 2 x 12V/80Ah CHARGER: 24V/8amp (GEN2 MINI-(2) 4amp BANKS) TURNING RADIUS: 88 5/8" (R2250mm) DISPLACEMENT OF GEAR PUMP: 1.2 ml/r TRAVEL SPEED WITH LOAD: 1.24 m/h TRAVEL SPEED W/O LOAD: 1.86 m/h STABILIZER WHEEL: Ø3x1 13/32 DRIVE WHEEL: Ø10 x 3" FRONT WHEEL: Ø3-1/8 x 3-3/8" OVERALL MAST HEIGHT: 78"

FIXED FORKS OVER FIXED LEGS SAFETY SHEILD SINGLE MAST HANDLE: CH-2

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE [] As drawn [] As marked

Signed: Date:

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING W.O.# X ALES: X DRAWN BY: TM 5/7/2018 REFERENCE: SCALE: 1:179 FILE NAME: QUOTED LEAD TIME: X QUOTE # SNM15-62-FF-27 X