

# SCISSOR DOCK LIFT - WL-100-10-712

## STANDARD FEATURES

MODEL NUMBER: WL-100-10-712  
 UNIT TO BE MOUNTED: AT SURFACE OR IN PIT (CIRCLE ONE)  
 CAPACITY (EVENLY DISTRIBUTED): 10,000 LBS  
 AXLE END LOAD CAPACITY IS: 8,250 LBS  
 AXLE SIDE LOAD CAPACITY IS: 7,000 LBS  
 OVERALL PLATFORM SIZE: 7' (84") x 12' (144")  
 USABLE PLATFORM SIZE: SEE DIAGRAM  
 RAISED HEIGHT: 72"  
 LOWERED HT: 14"  
 REMOVABLE HANDRAILS 45" HT W/ 21" MIDRAIL  
 AND 4" TOEBOARD, TOE BOARDS ARE: NON-REMOVABLE  
 TRUCK BRIDGE IS 72" W x 18" L  
 W RUN OFF GUARDS, CHAINS & HANDLES

SHIPPING WT IS: 6,229 LBS

6 1/2 HP POWER UNIT (SEE BOTTOM LEFT CORNER) W/ 8' OF HYDRAULIC HOSE  
 - 24 VAC HAND-HELD CONTROL ON A 4'-20' COIL CORD

REFER TO THE UNIT'S ELECTRICAL DIAGRAM FOR ELEC. SERVICE REQUIREMENTS  
 - INSTALL TO MEET ALL APPLICABLE STATE & LOCAL CODES FOR YOUR AREA!

5" BEVELED TOE GUARD WITH ELECTRIC TOE GUARD

- THE ELECTRIC TOE GUARD AND UPPER LIMIT SWITCH CIRCUITS MUST BE COMPLETED  
 BY INSTALLING AN 18/5 STO (OR EQUIV.) CABLE BETWEEN THE POWER UNIT  
 AND THE JUNCTION BOX LOCATED IN THE LIFT'S FRAME

UP SPEED AT FULL CAPACITY IS 4.3 SECONDS PER FOOT (@460 THREE PHASE)

FOR WARRANTY INFO SEE FORM WTY-91


**ARCHITECTURAL REVIEW FOR CORRECTNESS OF PIT AND FOR COMPLIANCE TO LOCAL AND STATE CODES IS RECOMMENDED.**

## \* Optional Features: (Available at additional cost)

- |   |   |
|---|---|
| ___ Dual speed hydraulic pump                           | ___ Flush removable handrails and toeboard          |
| ___ 2 HP single or three-phase power unit               | ___ Additional split steel bridge                   |
| ___ 3 HP single-phase power unit (1% GPM)               | ___ Split aluminum truck bridge                     |
| ___ 7 1/2 HP three-phase power unit (4.5 GPM)           | ___ Four-sided accordion skirt (customer installs)  |
| ___ 10 HP three-phase power unit (6 GPM)                | ___ Wheel and dolly jack kit (6,000# max. capacity) |
| ___ Control lockout key switch                          | ___ Automatic wheel chocks                          |
| ___ Warning beeper during travel                        | ___ Stop signal sign                                |
| ___ Warning strobe during travel                        | ___ Steel approach ramp ( ___" x ___")              |
| ___ Oil immersion heater w/ t'stat                      | ___ Cold galvanized deck and frame                  |
| ___ Power cord with twist-lock plug                     | ___ 115V single phase                               |
| ___ Longer hydraulic hose length                        |   |
| ___ 50,000 lbs. rollover capacity (lowered height + 2') |   |


\*\* Any additions, deletions or omissions must be corrected on this drawing, as this drawing will be considered all inclusive. \*\*

REMOTE POWER UNIT  
 Overall dimensions  
 13-1/4" W x 33" L x 31" H  
 (Cone w/ 8' hose)




**PLEASE CIRCLE SPECIFICATIONS:**

MOTOR VOLTAGE	208	230	<b>460</b>
<b>DEDICATED CIRCUIT REQUIRED</b>			
MOTOR PHASE	<b>(THREE)</b>		

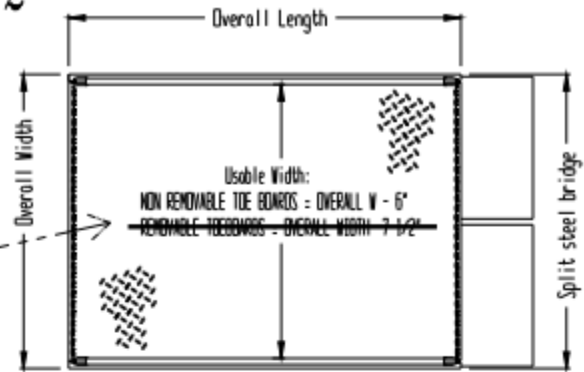

\*\*\*STANDARD UNIT NOT INTENDED FOR SIDE/CROSS LOADING

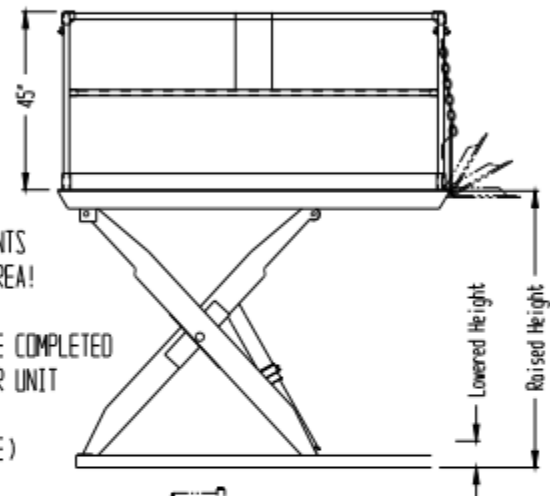

PRODUCTION WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

\*\*SPECIAL UNITS ARE NON-RETURNABLE  
 \*AVAILABLE AT ADDITIONAL COSTS

All graphics provided are for reference only.  
 If certain dimensions are critical please verify those dimensions with your salesperson

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN & DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT & INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS & STANDARDS.  
**ALL SPECIAL UNITS ARE NON-RETURNABLE**  
 ( ) As drawn ( ) As marked  
 Signed: \_\_\_\_\_ Date: \_\_\_\_\_  
 LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DEVELOPER'S NAME: _____	P.O. # : _____
DRAWN BY: _____	V.O. # : _____
DATE: _____	SALES: _____
REFERENCE: _____	SCALE: 1:40
QUOTED LEADTIME: _____	ORIG. FILE NAME: 05-007-025-001
QUOTE # : _____	