## PRE MIUM TRUCK SCISSOR DOCK LIFT - WL-100-8-78

\*\*\*ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE\*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

## STANDARD FEATURES

MODEL NUMBER: WL-100-8-78 UNIT TO BE MOUNTED: AT SURFACE OR IN PIT (CIRCLE ONE) CAPACITY (EVENLY DISTRIBUTED): 8,000 LBS OVERALL PLATFORM SIZE: (84" X 96") RAISED HEIGHT 70" ± 2" LOWERED HEIGHT: 10"

REMOVABLE HANDRAILS AND 4"NON-REMOVABLE TOE BOARDS 42" HT W/ 21" MIDRAIL

TRUCK BRIDGE IS 72" W X 18" L ROLLER END W/ CHAINS & HANDLES FRAME SIZE IS: 62" W X 93" L SHIPPING WT APPROX: 3400 LBS ± 6 1/2 HP POWER UNIT (SEE BOTTOM LEFT CORNER)

> W/ 8' OF HYDRAULIC HOSE -HAND-HELD CONTROL ON A 4'-20' COIL CORD

REFER TO THE UNIT'S ELECTRICAL

DIAGRAM FOR


ELECTRICAL SERVICE REQUIREMENTS

-INSTALL TO MEET ALL APPLICABLE STATE & LOCAL

CODES FOR YOUR AREA! 5" BEVELED TOE GUARD ARCHITECTURAL REVIEW FOR CORRECTNESS OF PIT AND FOR COMPLIANCE TO LOCAL AND STATE CODES IS RECOMMENDED.

96" OVERALL LENGTH USEABLE WIDTH= OVERALL MINUS 6' 84" '2"X 18" WITH REMOVABLE HANDRAILS OVERALL SPLIT NON-REMOVABLE TOE BOARDS WIDTH BRIDGE

\*\* STANDARD UNIT NOT INTENDED FOR SIDE CROSS LOAD \*\*

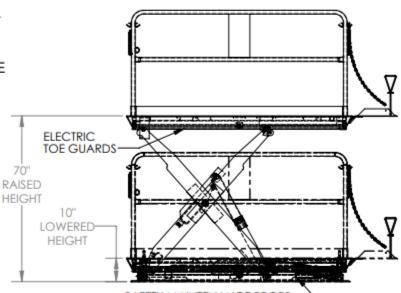

DIMENSION TOLERANCE ± 1/4"

## SPECIAL FEATURES

NONE

SAFETY MAINTENANCE PROPS

FOR INTE			
SALES		A	
ENG.		P	
FAB.		R	
POWER		0	
HYDRA OVERA 14"W x (COME	A L		

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

## ALL SPECIAL UNITS ARE NON-RETURNABLE [ ] As drawn As marked

Signed: Date: LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

	SIGNED ALL TROVAE DIVAVIING			
DISTRIBUTOR'S NAME:			P.O.# X	
			W.O.# X	
DRAWN BY: DLS		/2015	SALES: X	
REFERENCE: X		SCALE: 1:36		
QUOTED LEAD TIME: X	QUOTE #		05-007-314	

**POWER** AC MOTOR VOLTAGE 115 208 230 460 DEDICATED CIRCUIT REQUIRED 60Hz MOTOR PHASE SINCLE THREE CONTROL HAND

