

# MASTER SERIES HANDLE INSILLATION




**Step 1 :** Pull back the door gasket to expose the top and bottom mounting holes



**Step 2 :** Slide the screw into the spacer.



**Step 3 :** Slide the screw and spacer assembly in the hole in the door, making sure you see the threads on the other side

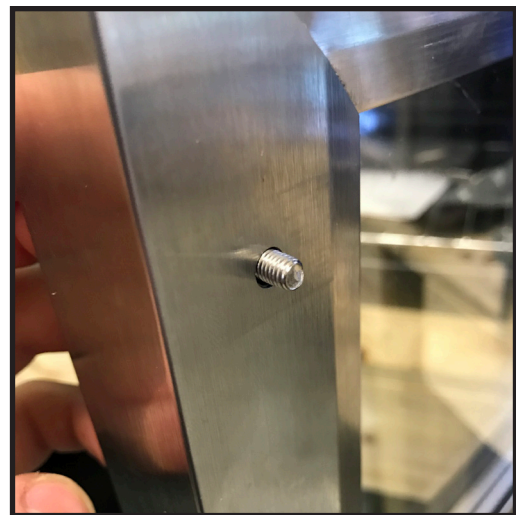

**Step 4 :** Use the provided allen tool to tighten the handle down snug. Do not over tighten.

**Step 5 :** Push the door gasket back into place, making sure the seal is fully seated in the gaskets groove.